
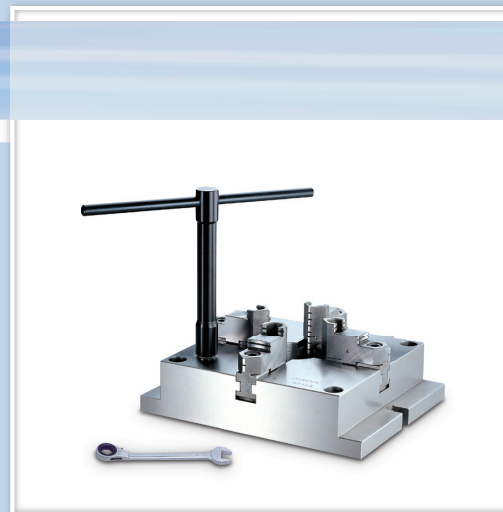


MC SUPER THIN SQUARE CHUCKS

方型超薄夾盤


- 1.MC 均為定寸研磨方式；任何相同規格之方型夾盤 W,X,Y,Z 各點之高度公差為0.05mm以內。
- 2.MC規格均可替換生爪，作不規則形狀之加工，以替代中心機大量治具，更經濟、方便。
- 3.硬爪重複夾持之精度公差為0.02mm 以內。
- 4.側邊平行校正後，硬爪夾持之平行公差為0.05mm以內。

尺寸圖 » Dimensions

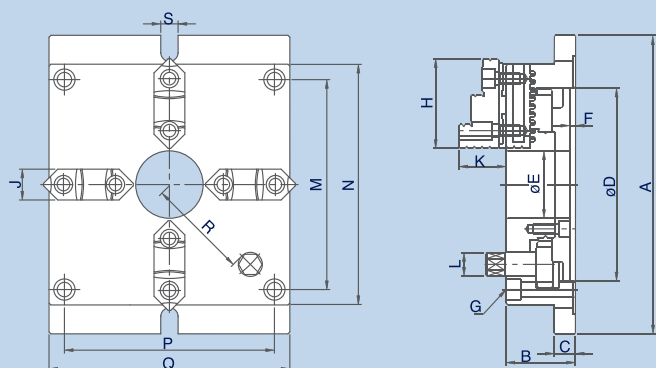

- 1.MC chucks are precisely ground, the tolerances of W,X,Y,Z among chucks are within 0.05mm.
- 2.Soft jaws can be used alternatively for machining special shaped work pieces, to substitute for designing and making a lot of jigs for this purpose.
- 3.The repetitive gripping accuracy with the hard jaws are within 0.02mm.
- 4.Parallel gripping accuracy with hard jaws can be controlled within 0.05mm after aligning sides of chucks.

使用範例 » Operation Example

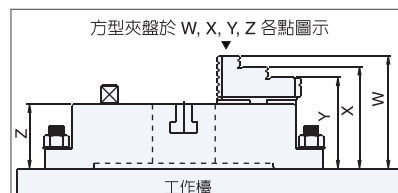

規格表 » Specifications

單位/UNIT:mm

型式/規格 MODEL / SPEC.	A	B	C	D	E	F	G	H	J	K	L	M
MC-06	215	57	18	130	40	5.5	4-M10x1.5P	68	26	39	14	144
MC-08	250	65	20	160	55	6	4-M12x1.75P	82	28	43	17	174
MC-10	310	72	22	200	70	6	4-M14x2P	93	32	50	21	218
MC-12	380	85	25	260	100	7	4-M16x2P	118	40	56	23	274
型式/規格 MODEL / SPEC.	N	P	Q	R	S	Max.Gripping Diameter 把握範圍				淨重 Weight (kg)		
						外徑把握 O.D.Clamping (mm)	內徑把握 I.D.Clamping (mm)					
MC-06	165	144	165	66	18	ø4-ø128	ø55-ø128					11.4
MC-08	200	174	200	83	18	ø5-ø162	ø62-ø162					18.6
MC-10	250	218	250	104	18	ø6-ø200	ø72-ø200					31.6
MC-12	310	274	310	135	22	ø10-ø265	ø90-ø265					56.6